STREET WARRIOR 7

170° Beam Angle

170° | 1.8W | IP68 | DC 12V | 5 YEAR WARRANTY

CHIPSET BY SEOUL

DIMENSIONS

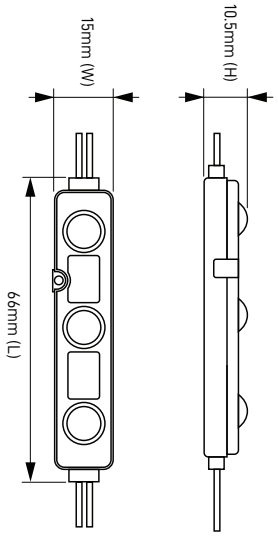

CHARACTERISTICS

Product Code	SW-7-170	**Warranty**	5 Year
Viewing Angle	170°	**Chipset**	Seoul Semiconductor
Colour Temperature	Cool White (10000K) 2000K 3000K 4000K 5000K 6000K 7000K 8000K 9000K 10000K		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	1.8 Watts	**Dimension (W*H*L)**	15*10.50*66mm

CONNECTION DIAGRAM

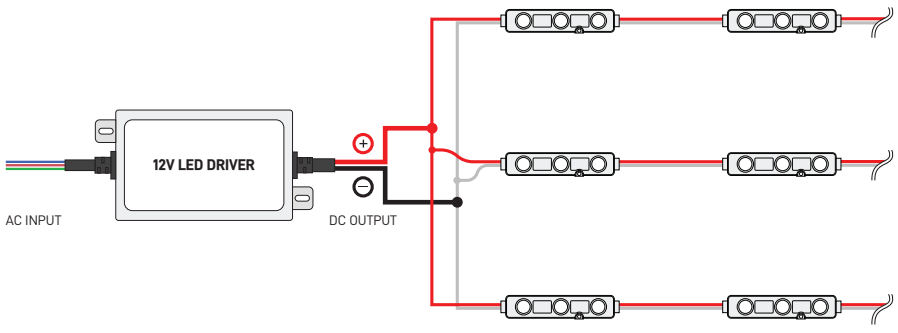

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.

STREET WARRIOR 7

160° Beam Angle

160° | 1.8W | IP68 | DC 12V | 5 YEAR WARRANTY

CHIPSET BY SEOUL

DIMENSIONS

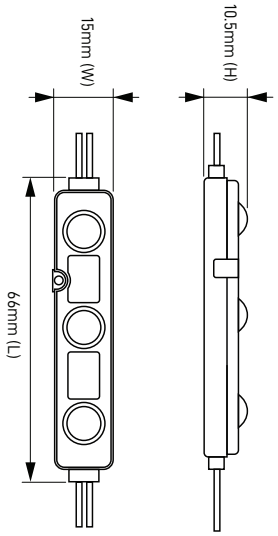

CHARACTERISTICS

Product Code	SW-7	**Warranty**	5 Year
Viewing Angle	160°	**Chipset**	Seoul Semiconductor
Colour Temperature	Cool White (10000K) 2000K 3000K 4000K 5000K 6000K 7000K 8000K 9000K 10000K		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	1.8 Watts	**Dimension (W*H*L)**	15*10.50*66mm

CONNECTION DIAGRAM

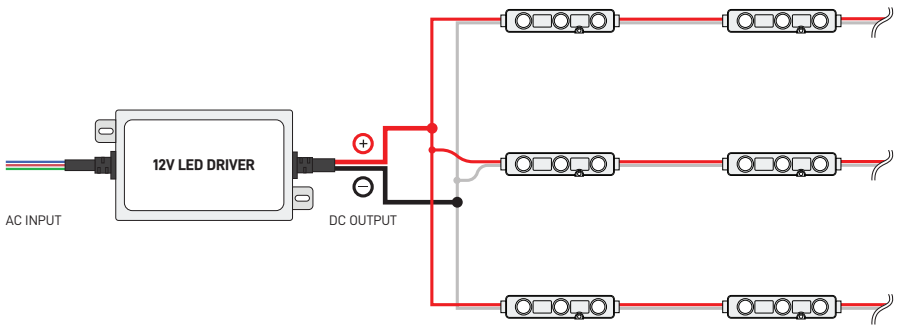

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.

STREET WARRIOR 7

Warm White (3000 - 3500K)

160°

1.8W

IP68

DC 12V

5 YEAR WARRANTY

DIMENSIONS

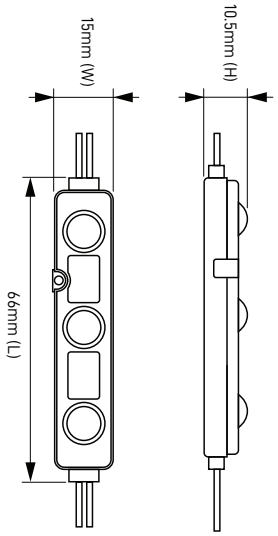

CHARACTERISTICS

Product Code	SW-7-WW	**Warranty**	5 Year
Viewing Angle	160°	**Chipset**	Seoul Semiconductor
Colour Temperature	Warm White (3000 - 3500K) 2000K 3000K 4000K 5000K 6000K 7000K 8000K 9000K 10000K		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	1.8 Watts	**Dimension (W*H*L)**	15*10.50*66mm

CONNECTION DIAGRAM

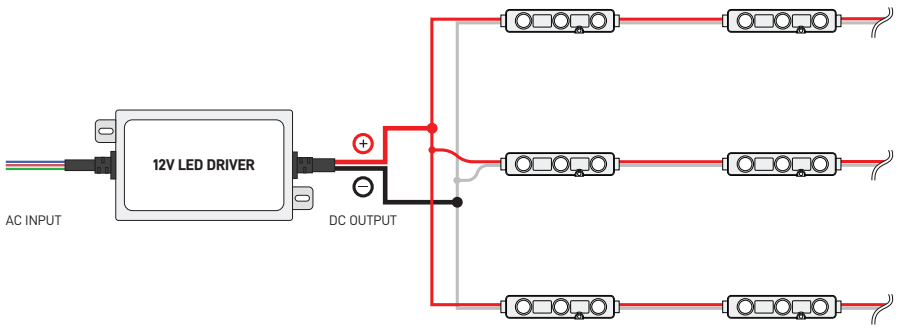

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.

STREET WARRIOR 7

Blue

160°

0.72W

IP68

DC 12V

3 YEAR WARRANTY

DIMENSIONS

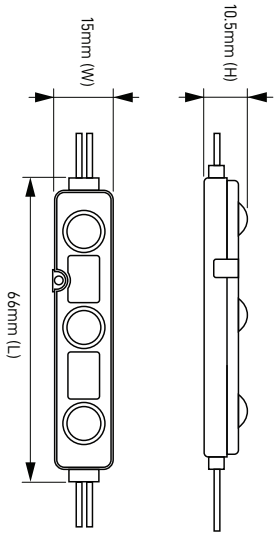

CHARACTERISTICS

Product Code	SW-7-BLUE	**Warranty**	3 Year
Viewing Angle	160°	**Chipset**	Seoul Semiconductor
Colour	Blue		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	0.72 Watts	**Dimension (W*H*L)**	15.5*5.6*78mm

CONNECTION DIAGRAM

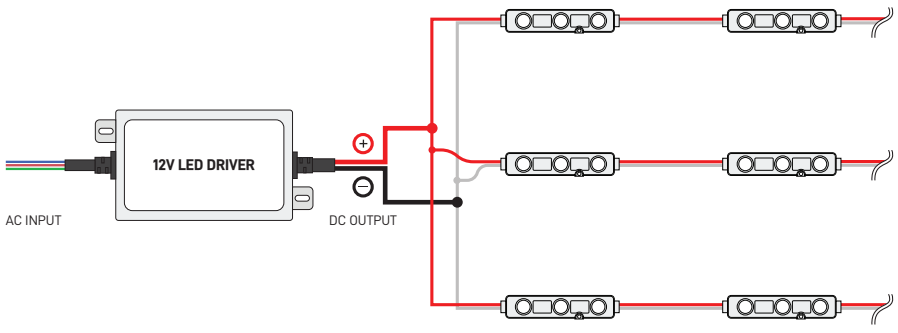

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.

STREET WARRIOR 7

Red

160°

0.72W

IP68

DC 12V

3 YEAR WARRANTY

DIMENSIONS

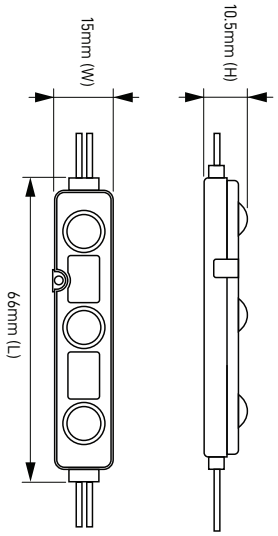

CHARACTERISTICS

Product Code	SW-7-RED	**Warranty**	3 Year
Viewing Angle	160°	**Chipset**	Seoul Semiconductor
Colour	Red		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	0.72 Watts	**Dimension (W*H*L)**	15.5*5.6*78mm

CONNECTION DIAGRAM

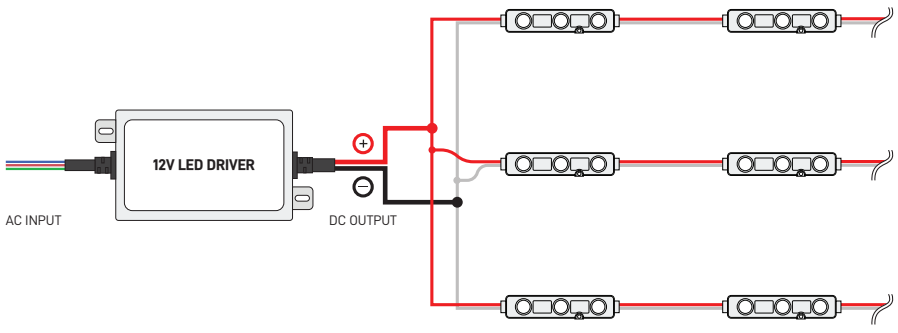

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.

STREET WARRIOR 7

Green

160° | 0.72W | IP68 | DC 12V | 3 YEAR WARRANTY

CHIPSET BY SEOUL

DIMENSIONS

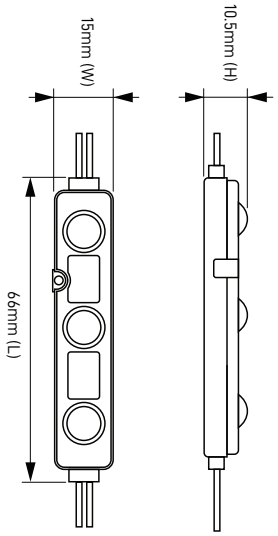

CHARACTERISTICS

Product Code	SW-7-GREEN	**Warranty**	3 Year
Viewing Angle	160°	**Chipset**	Seoul Semiconductor
Colour	Green		
IP Rating	IP68	**Modules Per String**	50
Input Voltage	DC 12V	**Applications**	Channel Letter Signs
Wattage	0.72 Watts	**Dimension (W*H*L)**	15.5*5.6*78mm

CONNECTION DIAGRAM

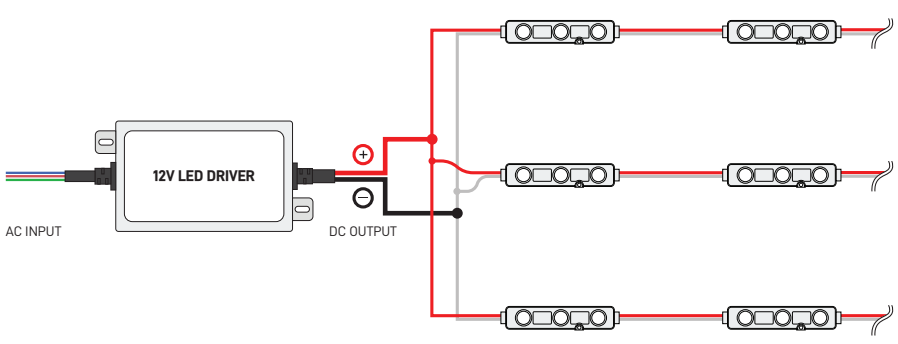

Tips and Cautions

- Use a compatible and properly rated power supply.
- Connect them in parallel to ensure consistent brightness.
- Ensure they are evenly distributed for uniform lighting.
- Do not exceed the number of modules per string to avoid voltage drop.
- Disconnect power before servicing to prevent electrical hazards.